

HD SERIES

TYPE MCT

THE ULTIMATE IN FLEXIBILITY - ONE UNIT WITH 7 SELECTABLE COLORS AND 7 TONES.

ALERT PERSONNEL WITH VISUAL AND AUDIBLE WARNINGS IN ONE UNIT. ROBUST POLYCARBONATE HOUSING THAT ALLOWS FOR USE IN THE MOST DEMANDING ENVIRONMENTS.



SPECIFICATIONS:

- Choice of Red, Green, Yellow, Blue, White, Light Blue, Violet
- Selectable Light Mode - stobing, flashing, pulsing, constant
- 7 tones
- Adjustable via potentiometer, up to 133dB
- 10ms response time
- IP65 thermoplastic housing
- UV resistant
- 12-30VAC/VDC, 48VAC/VDC, and 85-250VAC/VDC
- -20°C to 50°C (-4°F to 122°F)
- 50,000 hours life minimum



» Coding System

HD	-	MCT	-	13
Series		Type		Voltage
				1828 = 85-250V AC/DC *
				13 = 12-30V AC/DC
				48 = 48V AC/DC



 **Demo Video**

*standard stock item

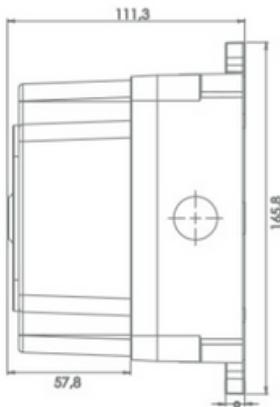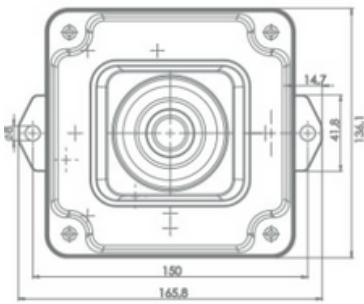

This unit may also be used as a horn ONLY by disconnecting an internal cable or light ONLY by silencing the alarm with the potentiometer

HD SERIES

6 FOOT PIGTAIL WITH MAGNET MOUNT KIT




**CONVENIENT PACKAGE TO ADD HEAVY DUTY
AUDIBLE/VISUAL WARNING TO ANY CRANE SYSTEM**

NEMA 4X PROTECTION RATING

**MAGNET MOUNTS FOR FLEXIBLE MOUNTING
INTERNAL WIRE CONNECTIONS VIA LEVER TERMINALS**

PREWIRED 6' PIGTAIL WITH 3/8 NPT CABLE GLAND

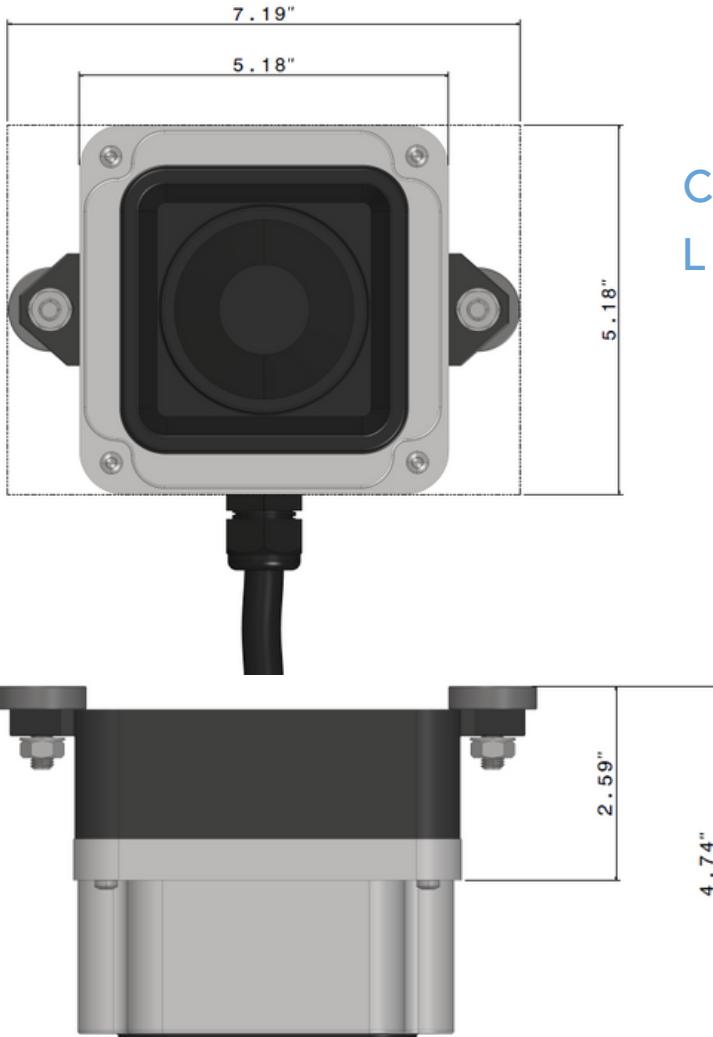

HD-1828-MAG-6PT

**CAN BE USED AS A HORN OR
LIGHT OR BOTH SIMULTANEOUSLY.**



MD SERIES

TYPE MCT100

THE ULTIMATE IN FLEXIBILITY - ONE UNIT WITH 4 SELECTABLE COLORS, 16 ADJUSTABLE VOLUME TONES, AND 3 LIGHT MODES IN A COMPACT SIZE.

ALERT PERSONNEL WITH VISUAL AND AUDIBLE WARNINGS IN ONE UNIT. MEDIUM DUTY UNIT WITH IMPACT RESISTANT ABS BASE AND POLYCARBONATE LENS. SUITABLE FOR TYPICAL INDUSTRIAL ENVIRONMENTS.

SPECIFICATIONS:




- Choice of Red, Blue, Green, or Yellow via wire connection
- Solid, Flashing, and Strobe Light Modes selectable via push button
- 16 tones selectable via push button
- 93-120dB (adjustable)
- 10ms response time
- IP65 thermoplastic housing
- UV resistant
- 12-24VAC/VDC and 40-250VAC/VDC
- -20°C to 50°C (-4°F to 122°F)
- 50,000 hours life minimum

» Coding System

MD	-	MCT100	-	125	
Series		Type		Voltage	
		125 = 40-250V AC/DC * 115 = 12-30V AC/DC			

*standard stock item

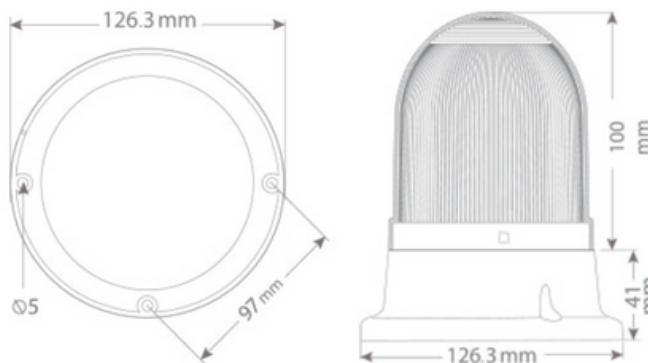

MD SERIES

JUNCTION BOX & 6 FOOT PIGTAIL WITH MAGNET MOUNT KIT




CONVENIENT PACKAGE TO ADD AUDIBLE/VISUAL
WARNING TO ANY CRANE SYSTEM

NEMA 4X PROTECTION RATING

MAGNET MOUNTS FOR FLEXIBLE MOUNTING
INTERNAL WIRE CONNECTIONS VIA LEVER TERMINALS

PREWIRED 6' PIGTAIL WITH 3/8 NPT CABLE GLAND

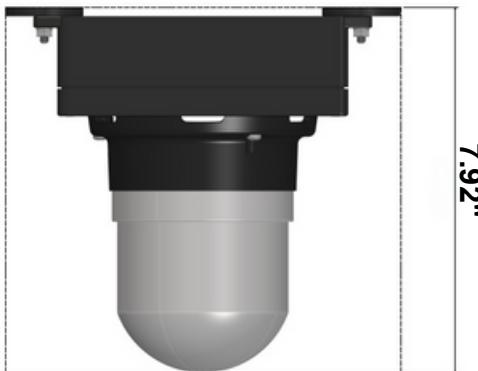

OPTION 1

FOR STANDARD 120V CONNECTION

MD-MCT100-125-JB-MAG-6PT-2C



OPTION 2

FOR RADIO CONTROL AUDIBLE/VISUAL
WARNING DEVICE

MD-MCT100-125-JB-MAG-6PT-5C

CAN BE WIRED TO ACTIVATE LIGHT AND HORN
SEPARATELY OR SIMULTANEOUSLY