


HEADS UP!

CRANE SAFETY LIGHTS

LED Line Lights

for Crane and Hoist Applications

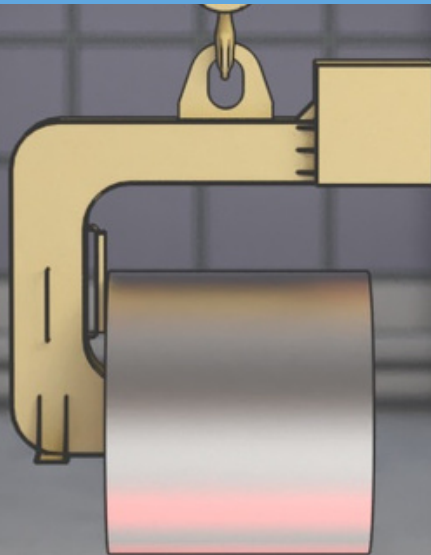

**FLOOR PROJECTED LED WARNING LIGHT SYSTEM THAT ALERTS
PERSONNEL OF OVERHEAD CRANE PROXIMITY**


**PRE-ENGINEERED KITS - LIGHTS, CABLING, AND JUNCTION
BOXES FOR TURNKEY SOLUTIONS**

MAX SERIES

SB HP, SB SUPER HP, SB HYPER HP (460VAC)

Heads Up! Crane Safety Light box configuration for trolley application.
Package includes four Max Series LED line lights and one pre-engineered junction box. Line lights come with integrated 460VAC power supply, cooling fan and 10' pigtail. J-Box consists of NEMA 4X enclosure with circuit protection, terminal strip, mounted cable glands.

Each Kit Consists Of -

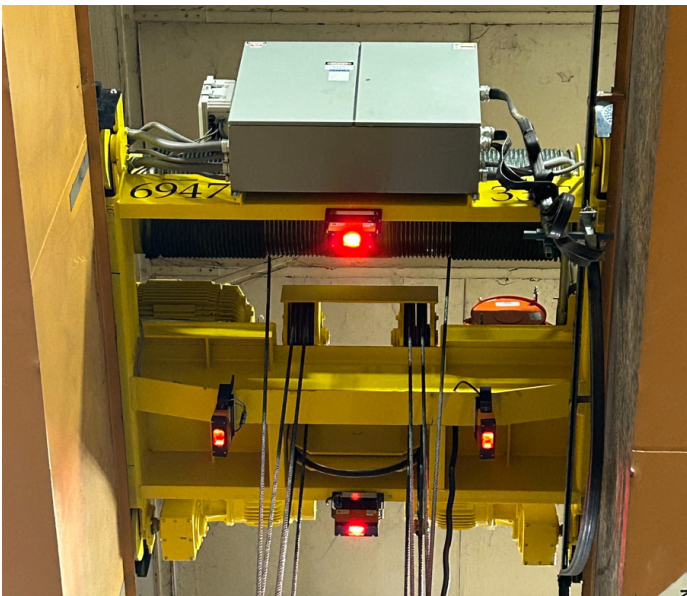

MAX SERIES

SB HP, SB SUPER HP, SB HYPER HP (460VAC)

HEAVY DUTY LED LINE LIGHT FOR BRIDGE AND TROLLEY APPLICATIONS. SUGGESTED FOR INSTALLATION HEIGHTS UP TO 20 METERS AND HEAVY DUTY ENVIRONMENTS.

SPECIFICATIONS:

- POWER SUPPLY: 460VAC OR 90-305VAC
- SB HP: 65W (BLUE) 50W (RED)
- SB SUPER HP: 98W (BLUE) 80W (RED)
- SB HYPER HP: 150W (BLUE) 120W (RED)
- AMP DRAW AT 120V:
 - SB HP: .54 AMPS (BLUE) .42 AMPS (RED)
 - SB SUPER HP: .82 AMPS (BLUE) .67 AMPS (RED)
 - SB HYPER HP: 1.25 AMPS (BLUE) 1 AMP (RED)
- AMP DRAW AT 460V:
 - SB HP: .14 AMPS (BLUE) .10 AMPS (RED)
 - SB SUPER HP: .21 AMPS (BLUE) .17 AMPS (RED)
 - SB HYPER HP: .33 AMPS (BLUE) .26 AMPS (RED)
- PROJECTED SHAPE: LINE (ADJUSTABLE LENGTH)
- OPERATING TEMPERATURE: -40°C TO 60°C (BLUE) -40°C TO 50°C (RED)
- MATERIALS: ANODIZED ALUMINUM (HOUSING), PAINTED STEEL (BRACKET), STAINLESS STEEL (SCREWS AND CABLE GLANDS), GLASS (LENSES), EPDM (GASKETS), PVC (LENS COVER)
- IP RATING: IP65
- IK RATING: IK08
- WEIGHT: 4.2 KG
- DIMENSIONS: 262 L X 65 H X 243 W (MM)
- 1 METER OR 3 METER PIGTAIL

***OPTION OF BLUE OR RED LIGHT**


Part Numbers

90-305VAC	460VAC	PRODUCT
LC0117N	LC0117N-HV	SB HP BLUE
LCO118N	LCO118N-HV	SB HP RED
LC0285N	LC0285N-HV	SB SUPER HP BLUE
LC0286N	LC0286N-HV	SB SUPER HP RED
LC1767	LC1767-HV	SB HYPER HP RED
LC1766	LC1766-HV	SB HYPER HP BLUE

***FOR 3 METER PIGTAIL, ADD -3 TO P/N**

WWW.ENGINEERED-COMPONENTS.COM | 828-683-0176 |




SALES@ENGINEERED-COMPONENTS.COM

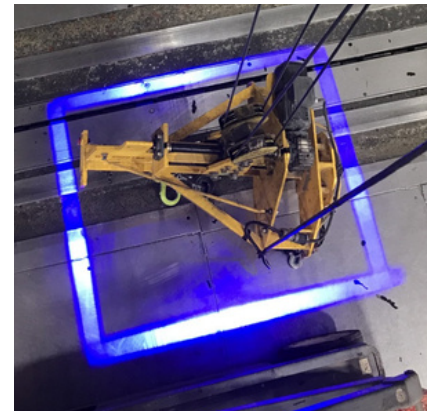

**LENS COVERS TO
ADJUST LINE LENGTH**

MAX SERIES

SB HP, SB SUPER HP, SB HYPER HP

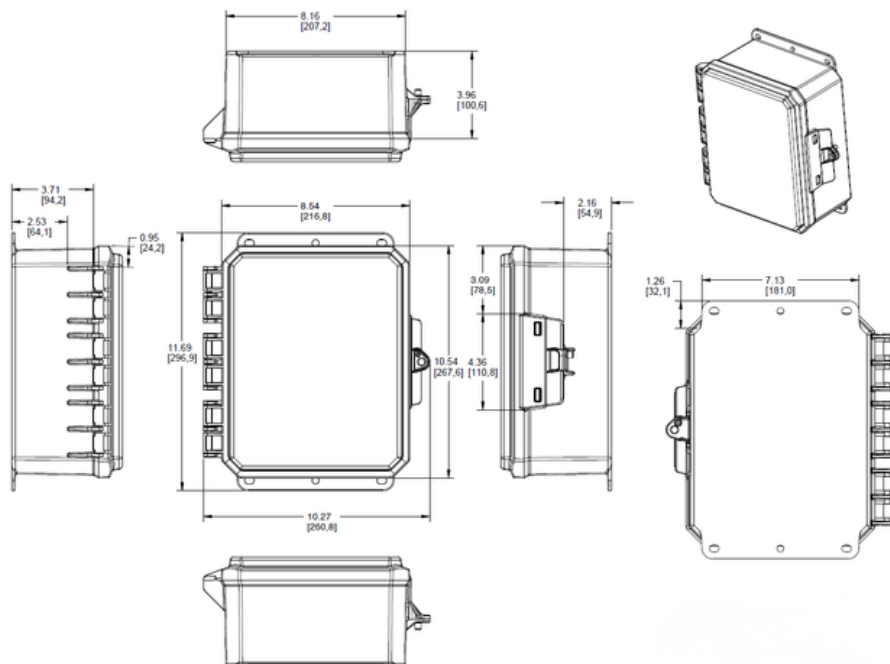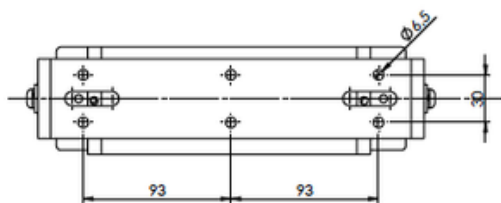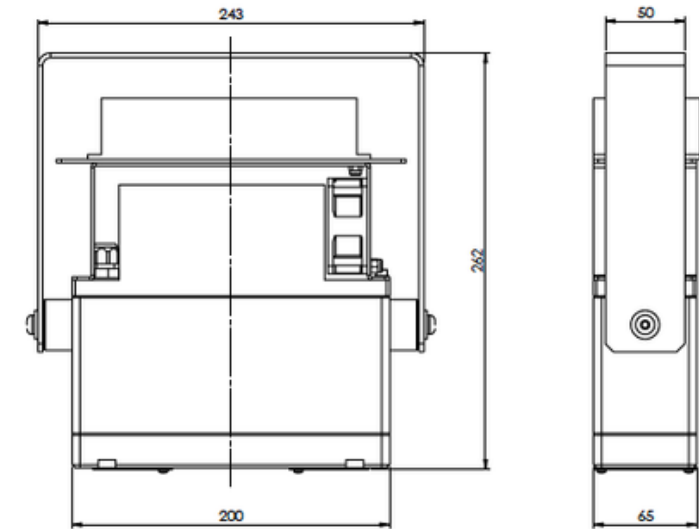

SB HP

Installation Height	Length	Thickness
5.0 M	3.30 M	73.00 mm
5.5 M	3.60 M	80.00 mm
6.0 M	3.90 M	87.00 mm
6.5 M	4.20 M	94.00 mm
7.0 M	4.60 M	102.00 mm
7.5 M	4.90 M	109.00 mm
8.0 M	5.20 M	116.00 mm
8.5 M	5.50 M	123.00 mm
9.0 M	5.90 M	131.00 mm
9.5 M	6.20 M	138.00 mm
10.0 M	6.50 M	145.00 mm
12.0 M	7.80 M	174.00 mm

SB SUPER HP & SB HYPER HP

Installation Height	Length	Thickness
8.0 M	5.20 M	116.00 mm
8.5 M	5.50 M	123.00 mm
9.0 M	5.90 M	131.00 mm
9.5 M	6.20 M	138.00 mm
10.0 M	6.50 M	145.00 mm
10.5 M	6.80 M	152.00 mm
11.0 M	7.20 M	160.00 mm
11.5 M	7.50 M	167.00 mm
12.0 M	7.80 M	174.00 mm
12.5 M	8.10 M	181.00 mm
13.0 M	8.50 M	189.00 mm
13.5 M	8.80 M	196.00 mm
14.0 M	9.10 M	203.00 mm
14.5 M	9.40 M	210.00 mm
15.0 M	9.80 M	218.00 mm
15.5 M	10.10 M	225.00 mm
16.0 M	10.40 M	232.00 mm
16.5 M	10.70 M	239.00 mm
17.0 M	11.10 M	247.00 mm
17.5 M	11.40 M	254.00 mm
18.0 M	11.70 M	261.00 mm
18.5 M	12.00 M	268.00 mm
19.0 M	12.40 M	276.00 mm
19.5 M	12.70 M	283.00 mm
20.0 M	13.00 M	290.00 mm